

Ultraskin™

Hydrophilic Guide Wire



Product Information

Features


- Nitinol core wire
- Soft tapered tip
- Polyurethane jacket with tungsten
- Hydrosurf™ coating
- 1:1 transmission

Benefits

- Excellent kink resistance
- Good tip shape retention
- Enhanced visibility
- Outstanding pushability
- Minimized damage to vessel wall
- Super smooth insertion


Ranges

- Outer diameter: 0.018"/0.032"/0.035"
- Length: 150/180/260cm
- Tip curve: straight/135°angled/reshapable

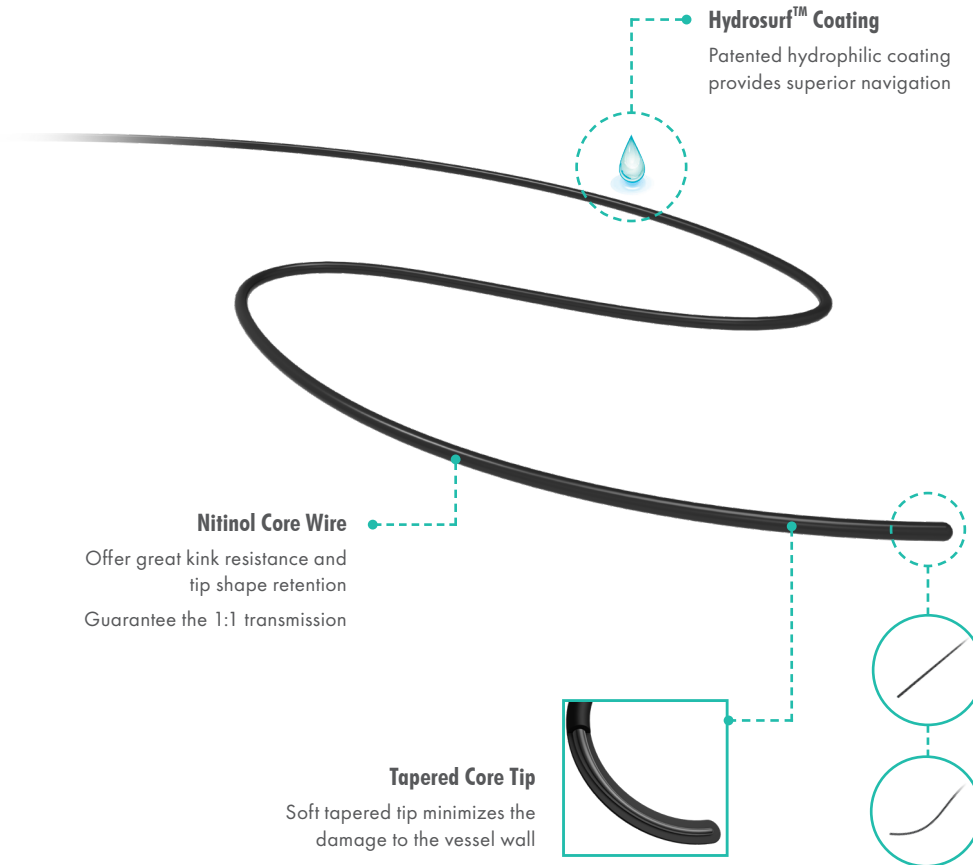


Super Smooth and Stable Hydrosurf™ Coating

The patented hydrophilic coating contributes to excellent navigation, which is shown by the uniform and low friction after multi-times tests.

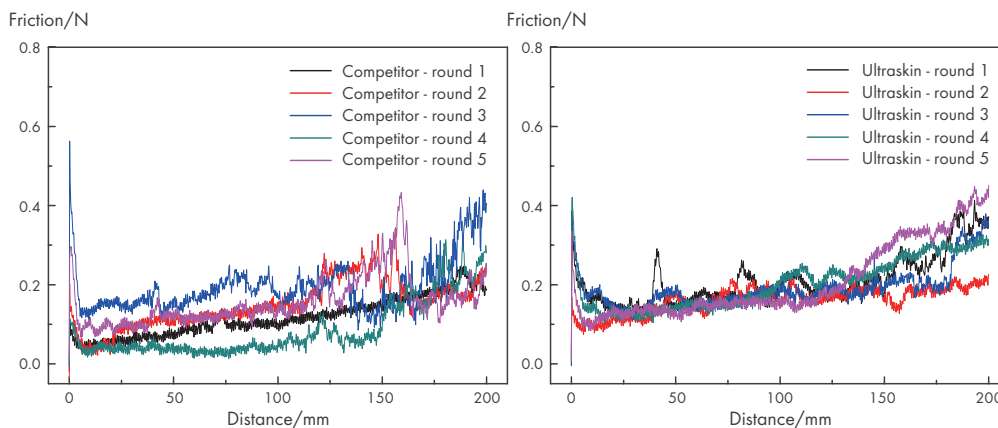


Soft and Flexible Tip

The soft tip minimizes the damage to vessel wall to ensure patients' safety.

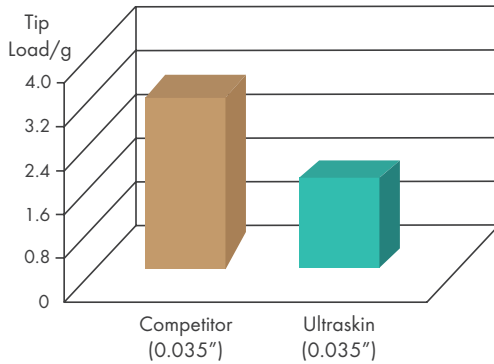

Good Radial Support

Greater radial support guarantees the pushability during guide wire insertion.

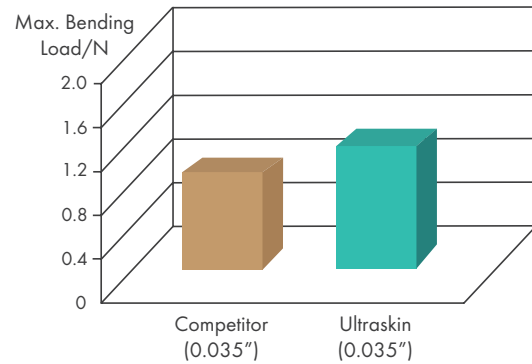

Ordering Information

Catalogue No.	Outer Diameter	Guide Wire Length	Distal Curve	Note
SD-S18150	0.018"	150cm	Straight	Standard
SD-A18150	0.018"	150cm	135° Angled	Standard
SD-S32150	0.032"	150cm	Straight	Standard
SD-A32150	0.032"	150cm	135° Angled	Standard
SD-S32180	0.032"	180cm	Straight	Standard
SD-A32180	0.032"	180cm	135° Angled	Standard
SD-S32260	0.032"	260cm	Straight	Standard
SD-A32260	0.032"	260cm	135° Angled	Standard
SD-S35150	0.035"	150cm	Straight	Standard
SD-A35150	0.035"	150cm	135° Angled	Standard
SD-S35180	0.035"	180cm	Straight	Standard
SD-A35180	0.035"	180cm	135° Angled	Standard
SD-S35260	0.035"	260cm	Straight	Standard
SD-A35260	0.035"	260cm	135° Angled	Standard
SP-S35150	0.035"	150cm	Straight	Reshapable Tip
SP-A35150	0.035"	150cm	135° Angled	Reshapable Tip
SP-S35180	0.035"	180cm	Straight	Reshapable Tip
SP-A35180	0.035"	180cm	135° Angled	Reshapable Tip
ST-S35150	0.035"	150cm	Straight	Stiff Shaft
ST-A35150	0.035"	150cm	135° Angled	Stiff Shaft